



Efficient LED spotlight range with interchangeable reflectors for spot and wide flood beam angles

- The unobtrusive design features complement all environments and the luminaire integrates well into a variety of architectural surroundings
- Easy to clean transparent glass on the front protects the LED light source
- Choice of surface mounting or 3 circuit track
- Easy to install interchangeable reflectors with simple bayonet function


Applications

- Retail
- Showrooms
- Stores
- Shopping mall
- Hotels and restaurants
- Cafes and bars

Lamp information

- Lifetime: 50 000 hours @L70 Ta 25°C
- Up to 3 800lm
- Up to 95lm/W
- Colour temperature: 3000K and 4000K
- CRI: 80
- Colour consistency: MacAdams 3
- Spot, flood and wide flood reflector optics


Overview

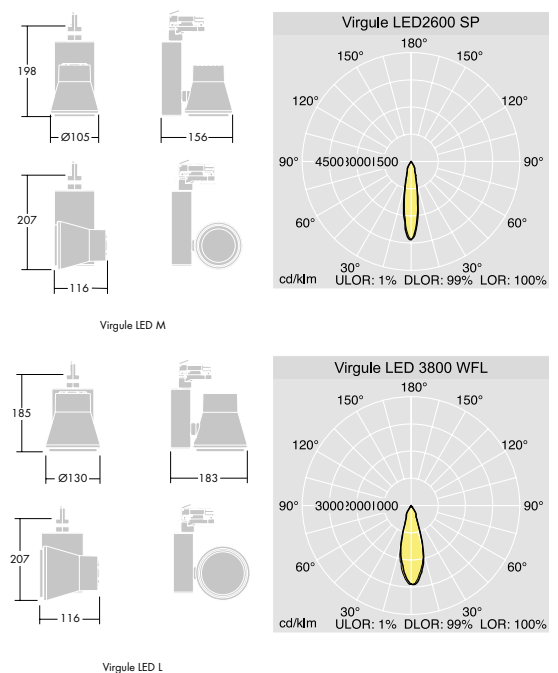

Standards



Light Source



Overview



Ordering Guide

Description	Wt (Kg)	SAP Code
Virgule LED White Housing		
VIRGULE M LED2600-830 MT3 FL WH	0.95	96644503
VIRGULE M LED2600-840 MT3 FL WH	0.95	96644511
VIRGULE L LED3800-830 MT3 FL WH	1.45	96644519
VIRGULE L LED3800-840 MT3 FL WH	1.45	96644527
Virgule LED Black Housing		
VIRGULE M LED2600-830 MT3 FL BK	0.95	96644507
VIRGULE M LED2600-840 MT3 FL BK	0.95	96644515
VIRGULE L LED3800-830 MT3 FL BK	1.45	96644523
VIRGULE L LED3800-840 MT3 FL BK	1.45	96644531
Virgule Accessories		
VIRGULE LED M REFLECTOR SP		96665573
VIRGULE LED M REFLECTOR WFL		96665574
VIRGULE LED L REFLECTOR SP		96665575
VIRGULE LED L REFLECTOR WFL		96665576
VIRGULE SURFACE MOUNT ADAPTER WH		96628186
VIRGULE SURFACE MOUNT ADAPTER BK		96628187

Materials/Finish

Body: aluminium painted, white or black
Trackbox: aluminium painted, white or black
Reflector: anodised aluminium, faceted

Installation/Mounting

Suitable for 3 circuit multiadaptor or surface mounting.
Track mounting: mechanical and electrical track connection is made using the track multiadaptor, which fixes quickly to the track clamping points with a simple clockwise turn of the fixing lever.
Select the desired circuit (1, 2 or 3) using the selector on the top of the trackbox before installing onto the track.
Rotation 0° - 355°, tilt 0° - 180°
Interchangeable reflectors easily mounted by tool-free bayonet function.

Specification

To specify state:
LED spotlight optimised for efficient accent lighting for shops and showrooms; innovative thermal design for passive cooling; luminaire with 3-phase universal adapter; Colour rendering Ra>80; chromaticity tolerance MacAdam 3; reflector anodised with rotationally symmetrical light beam; lifetime: 50 000 hours L70; UVA-free and IR-free light; mains voltage: 220-240V/ 50/60Hz; spotlight can rotate through 355° and tilt through 180°; spotlight housing made of die-cast aluminium, surface finish: painted white or black; glare reduction via front ring of polycarbonate, black; faceted specular reflector made of polycarbonate (PC) highly reflective aluminium anodised finish; reflector designed to be interchangeable and retrofitted.
As Thorn Virgule LED.

Art Nr: 96644104



5 Year Warranty

As a globally leading luminaire manufacturer, Thorn Lighting provides a five-year warranty for its complete product range within all European Countries.

www.thornlighting.com/VRG2

THORN
LIGHTING PEOPLE