96632322 <NS SRP FX 16L45-830 HFX CL2 SCN ANT

ISO 9223 C3 | IP66 | halogen | IK08 | CE | Ta -30 +50

Compact LED Park and path luminaire of 16 LED optics configured as 2/8 variant. Colour rendering Ra > 80, colour temperature 3000 K. Luminaire with "street narrow" road light distribution with backlight component to the rear. Luminaire of aluminium, microtextured paint in anthracite. ambient temperature: -30°C to +50°C. Integrated IP68 plug/socket for plug & play connection. Installation to column. Luminaire wired with halogen-free leads; degree of protection: IP66; class of protection: SC2, weight: 8.2 kg.

TLG_NISI_F_ARP2X8.jpg

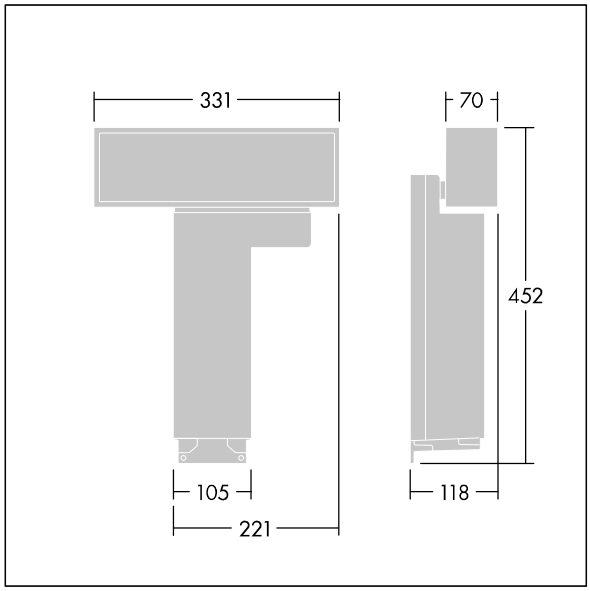

TLG_NISI_M_Mast_2x8.wmf

Dette produktet inneholder en lyskilde med energieffektivitetklasse D.

Alle verdier merket med * er merkeverdi. Thorn bruker utprøvde og testede komponenter fra ledende leverandører, men det kan skje enkelttilfeller av teknologirelatert svikt i individuelle LED i løpet av beregnet levetid for produktet. Internasjonale standarder setter toleransen i innledende fluks og tilkoblet effekt til ±10 %. Med mindre annet er oppgitt, gjelder verdiene for en omgivelsestemperatur på 25 °C.

Thorn Lighting driver konstant utviklig and forbedring av sine produkter. Rettighetene gjelder endringer i spesifikasjoner uten opplysning på forhånd, enten personlig eller offentlig. © Thorn Lighting

96632322 <NS SRP FX 16L45-830 HFX CL2 SCN ANT

Thorn Lighting driver konstant utviklig and forbedring av sine produkter. Rettighetene gjelder endringer i spesifikasjoner uten opplysning på forhånd, enten personlig eller offentlig. © Thorn Lighting