



PopPack

PopPack LED-lyslist

- LED-erstatning, én til én, for enkle og doble T8-/T5-lysrørlist
- Opptil 153 lm/W – overstiger kravene i byggeforskrifter
- Skruer (ekstrautstyr) kan tilføyes endestykker for å låse huset og dermed øke sikkerheten
- Ytterligere besparelser kan oppnås med DALI-styring og en integrert PIR-sensor.
- Versions adapted for mounting onto Contus trunking available.



Fotografier, strektegninger og fotometrisk data er kun eksempler. Velg et produkt for å se spesifikk produktinformasjon.

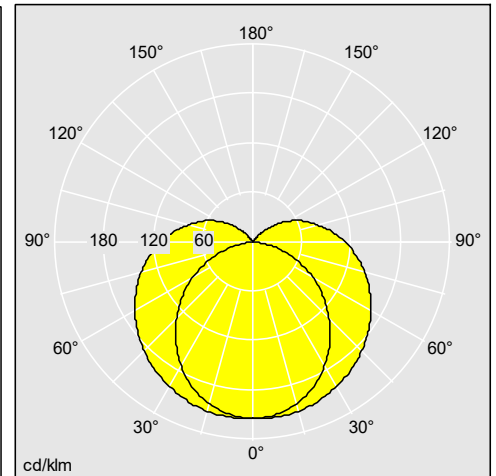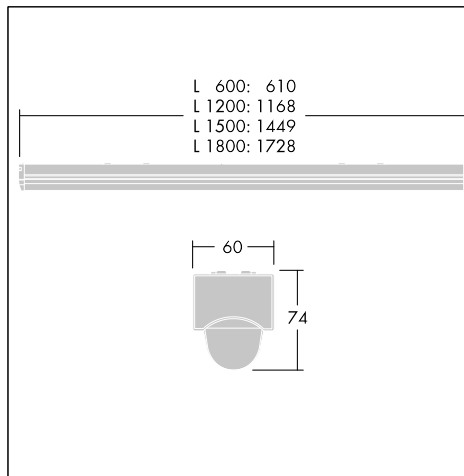

96242251

Material/Finish

Lyslist: lakkert valset stål, hvit (RAL9016)
 Endestykker/lyskildeholdere: sprøytet polykarbonat, hvit
 Avskjerming: strukturert opal akryl
 Contus-adapter: lakkert valset stål, hvit (tilsvarende RAL9016)

Installering/montering

1 or 2 x (3 x 2 x 2.5mm²) terminal blocks with capacity for loop in/out 2.5mm² cables. Ambient temperature: -20 to +25°C for the standard product, 0 to 25°C for the emergency versions, normal, dry, indoor atmospheres. Suitable for direct surface mounting, BESA mounting or wire suspension. Easy alignment through slots in the spine. Optional screws can be added to end caps to lock the housing.

Versions adapted for Contus trunking come pre-assembled, ready to fit quickly and easily with twist & lock mechanical/electrical connections.

PopPack

Bestillingsveiledning

Beskrivelse	ILCOS-kode	Sokkel	Vekt (kg)	SAP-nummer	Kat. nr.
PopPack -lyslister					
POPPACK LED 6500-840 HF L1800	LED		1,8	96631566	
POPPACK LED 11000-840 HF L1800	LED		1,8	96631570	
POPPACK LED 3000-830 HF L1200	LED		1,4	96631574	
POPPACK LED 4500-830 HF L1200	LED		1,4	96631575	
POPPACK LED 7000-830 HF L1200	LED		1,4	96631576	
POPPACK LED 5000-830 HF L1500	LED		1,7	96631578	
POPPACK LED 6000-830 HF L1500	LED		1,7	96631579	
POPPACK LED 6500-830 HF L1800	LED		1,8	96631580	
POPPACK LED 3000-840 HF L1200	LED		1,3	96631538	
POPPACK LED 4500-840 HF L1200	LED		1,4	96631542	
POPPACK LED 7000-840 HF L1200	LED		1,4	96631546	
POPPACK LED 5000-840 HF L1500	LED		1,7	96631554	
POPPACK LED 6000-840 HF L1500	LED		1,7	96631558	
POPPACK LED 9000-840 HF L1500	LED		1,7	96631562	
POPPACK LED 1700-840 HF L600	LED		0,74	96634320	
POPPACK LED 2300-840 HF L600	LED		0,74	96634321	
PopPack -lyslister med dimming					
POPPACK LED 9000-840 HFI L1500	LED		1,7	96631564	
POPPACK LED 6500-840 HFI L1800	LED		1,8	96631568	
POPPACK LED 11000-840 HFI L1800	LED		1,8	96631572	
POPPACK LED 3000-840 HFI L1200	LED		1,4	96631540	
POPPACK LED 4500-840 HFI L1200	LED		1,4	96631544	
POPPACK LED 7000-840 HFI L1200	LED		1,4	96631548	
POPPACK LED 5000-840 HFI L1500	LED		1,7	96631556	
POPPACK LED 6000-840 HFI L1500	LED		1,7	96631560	
POPPACK LED 1700-840 HFI L600	LED		0,83	96634322	
POPPACK LED 2300-840 HFI L600	LED		0,83	96634323	
PopPack -lyslister, nødllys					
POPPACK LED 9000-840 HF E3 L1500	LED		2,3	96631563	
POPPACK LED 6500-840 HF E3 L1800	LED		2,5	96631567	
POPPACK LED 11000-840 HF E3 L1800	LED		2,5	96631571	
POPPACK LED 3000-840 HF E3 L1200	LED		2	96631539	
POPPACK LED 4500-840 HF E3 L1200	LED		2	96631543	
POPPACK LED 7000-840 HF E3 L1200	LED		2	96631547	
POPPACK LED 5000-840 HF E3 L1500	LED		2,3	96631555	
POPPACK LED 6000-840 HF E3 L1500	LED		2,3	96631559	
PopPack -lyslister med dimming, nødllys					
POPPACK LED 9000-840 HFI E3 L1500	LED		2,3	96631565	
POPPACK LED 6500-840 HFI E3 L1800	LED		2,5	96631569	
POPPACK LED 11000-840 HFI E3 L1800	LED		2,5	96631573	
POPPACK LED 3000-840 HFI E3 L1200	LED		2	96631541	
POPPACK LED 4500-840 HFI E3 L1200	LED		2	96631545	
POPPACK LED 7000-840 HFI E3 L1200	LED		2	96631549	

PopPack

Beskrivelse	ILCOS-kode	Sokkel	Vekt (kg)	SAP-nummer	Kat. nr.
POPPACK LED 5000-840 HFI E3 L1500	LED		2,3	96631557	
POPPACK LED 6000-840 HFI E3 L1500	LED		2,3	96631561	
PopPack -lyslist, med sensor					
POPPACK LED 3000-840 PIR L1200	LED		1,4	96631581	
POPPACK LED 4500-840 PIR L1200	LED		1,4	96631582	
POPPACK LED 7000-840 PIR L1200	LED		1,4	96631583	
POPPACK LED 5000-840 PIR L1500	LED		1,7	96631585	
POPPACK LED 6000-840 PIR L1500	LED		1,7	96631586	
POPPACK LED 9000-840 PIR L1500	LED		1,7	96631587	
POPPACK LED 6500-840 PIR L1800	LED		1,8	96631588	
POPPACK LED 11000-840 PIR L1800	LED		1,8	96631589	
PopPack tilbehør					
SWITCHLITE CC PROGRAMMER			0,017	96240295	
POPPACK LED WIRE SUSPENSION KIT 2M			0,25	96627711	
POPPACK LED WIRE GUARD 1,2M			0,69	96627902	
POPPACK LED WIRE GUARD 1,8M			1,04	96627903	
POPPACK LED WIRE GUARD 1,5m			0,74	96628147	
POPPACK LED GROMMET KIT			0,035	59010377	
POPPACK LED SCREW KIT x20			0,06	59010828	
POPPACK LED SCREW KIT x100			0,08	59010829	